



天然气疏水阀



HTS100系列

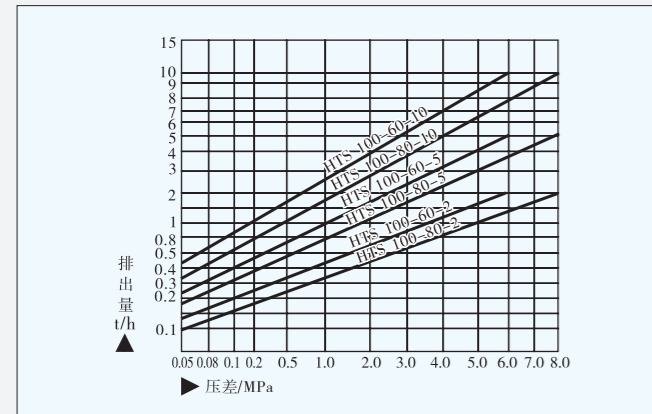

安装示例简图

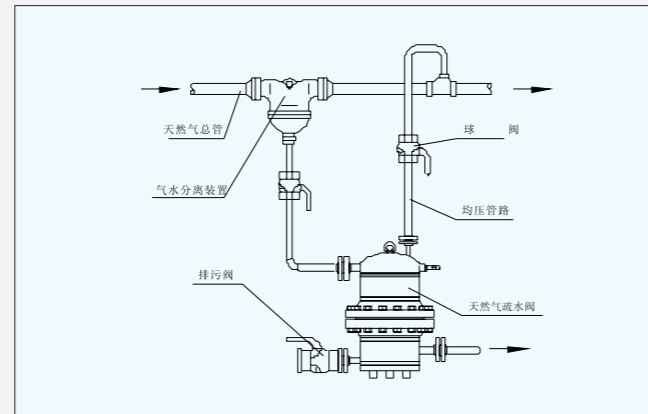

● 外形·参数一览表

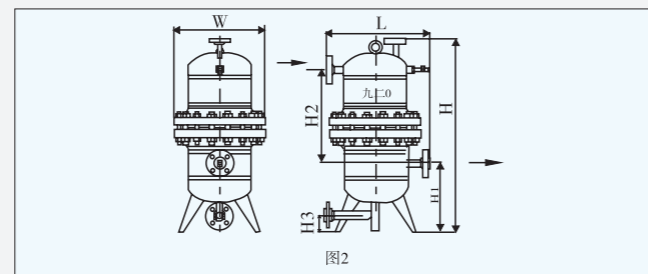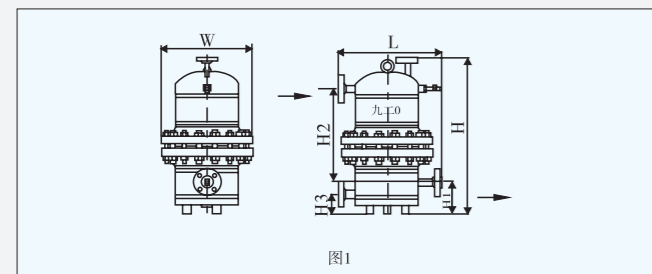

产品型号	公称压力 PN	最大工作压差 MPa	排水量 t/h	公称尺寸 DN	工作温度 ℃	壳体 材质	外形尺寸/mm						图示					
							L	H	H1	H2	H3	W						
HTS16	PN16	0.8	2	15~80	常温	20#	460	640	160	380	100	Φ380	图1					
				100~150														
			5	15~80			520							720	160	400	100	Φ465
				100~150														
			10	15~80			520							840	160	520	100	Φ465
				100~150														
	15	15~80	560	920			160	600	100	Φ540								
		100~150																
	1.6	2	15~80	460			640	160	380	100	Φ380							
			100~150															
		5	15~80	520								720		160	400	100	Φ465	
			100~150															
10		15~80	520	840	160	520						100	Φ465					
		100~150																
15	15~80	560	920	160	600	100	Φ540											
	100~150																	
HTS25	PN25	2.0	2	15~80	常温	20#	460	640	160	380	100	Φ380	图1					
				100~150														
			5	15~80			520							720	160	400	100	Φ465
				100~150														
			10	15~80			520							900	160	580	100	Φ465
				100~150														
			15	15~80			560	1000	160	680	100	Φ540						
				100~150														

天然气疏水阀

产品型号	公称压力 PN	最大工作压差 MPa	排水量 t/h	公称尺寸 DN	工作温度 ℃	壳体 材质	外形尺寸/mm						图示											
							L	H	H1	H2	H3	W												
HTS40	PN40	3.0	2	15~80	常温	20#	500	720	160	400	100	Φ465	图1											
				100~150																				
			5	15~80			560							740	160	420	100	Φ465						
				100~150																				
			10	15~80			600							1060	320	580	100	Φ540						
				100~150																				
			15	15~80			640	1160	320	680	100	Φ540												
				100~150																				
			HTS63	PN63			4.5	2	15~80	常温	16MnR	520		800	160	480	100	Φ465	图1					
									100~150															
								5	15~80			560								920	160	600	100	Φ465
									100~150															
10	15~80	600			1160	320		680	100			Φ540												
	100~150																							
15	15~80	640			1280	320		800	100			Φ540												
	100~150																							
5.5	2	15~80			520	800		160	480			100	Φ465											
		100~150																						
	5	15~80			560		920			160	600			100	Φ465									
		100~150																						
	10	15~80			600		1160			320	680			100	Φ540									
		100~150																						
	HTS100	PN100			6.0		2			15~80	常温			16MnR	520	1000	320	480	100	Φ465	图2			
										100~150														
							5			15~80					560							1120	320	600
100~150																								
10			15~80	600		1200	320	680	100	Φ540														
			100~150																					
8.0			2	15~80		520	1000	320	480	100		Φ465												
				100~150																				
			5	15~80		560							1120		320	600	100	Φ465						
				100~150																				
			10	15~80	600	1200					320		680	100	Φ540									
				100~150																				

说明：1、此表外形尺寸及参数仅供参考，我公司可根据用户要求进行设计。  
2、特殊工况和排量的天然气疏水阀，我公司可单独设计。